


**Objective Paper-II**

- Singing of telephone wires in the wind occurs due to
  - Vibrations are caused by birds as they sit on or get off the wires
  - Tensioning at the ends
  - Magnus effect
  - Generation of Karman Vortex street
- Which one of the following statements is correct?
  - Local atmospheric pressure is always lesser than standard atmospheric pressure
  - Local atmospheric pressure depends upon the elevation of the locality only
  - Standard atmospheric pressure is the mean atmospheric pressure at sea level
  - A barometer reads the difference between local and standard atmospheric pressures
- In the figure given below, the pressure gauge will record a gauge pressure equivalent to

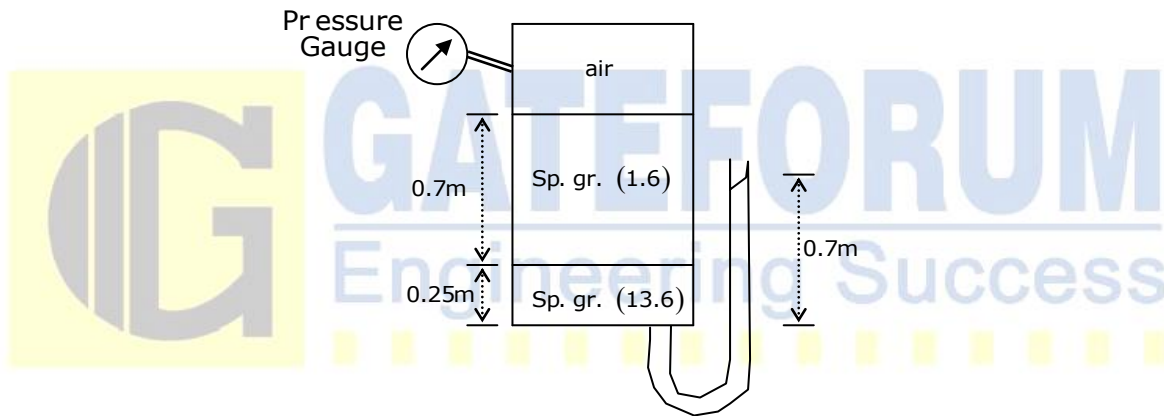

- 6.12m of water
  - 1.21m of mercury
  - 0.5 bar
  - 34,000 Pa
- The movement of air mass in the case of Tornado can be described as
    - Forced vortex throughout
    - Free vortex throughout
    - Forced vortex at the core and free vortex outside
    - Free vortex at the core and forced vortex outside
  - Match List I with List II and select the correct answer using the code given below the lists.

List I		List II	
P	Specific gravity	1	$M^0L^2T^{-1}$
Q	Coefficient of viscosity	2	$M^0L^0T^0$
R	Kinematic viscosity	3	$ML^{-1}T^{-1}$
S	Stress	4	$ML^{-1}T^{-2}$

- (A) P-2, Q-3, R-1, S-4  
(B) P-4, Q-3, R-1, S-2  
(C) P-2, Q-1, R-3, S-4  
(D) P-4, Q-1, R-3, S-2

6. Match List I with List II and select the correct answer using the code given below the lists.

List I		List II	
P	Rehbock formula	1	Sutro weir
Q	Francis formula	2	Rectangular suppressed weir
R	A special trapezoidal weir	3	Broad-crested weir
S	Linear proportional weir	4	Cippolletti weir
		5	Rectangular contracted weir

- (A) P-2, Q-3, R-4, S-1  
(B) P-5, Q-3, R-4, S-2  
(C) P-2, Q-5, R-4, S-1  
(D) P-1, Q-5, R-3, S-2

7. Poise has the unit of

- (A) Dyne – cm / s<sup>2</sup>      (B) Dyne – cm / s      (C) Dyne – s / cm      (D) Dyne – s / cm<sup>2</sup>

8. Consider the following statements

1. There is no flow across a streamline
2. Streamline spacing varies directly with velocity at the section
3. Streamlines do not cross
4. In steady flow, streamline pattern does not change with time

Which of these statements in respect of stream flow pattern are correct?

- (A) 1,2,3 and 4      (B) 1 and 2 only  
(C) 1,3 and 4 only      (D) 2,3 and 4 only

9. A fire hose has a nozzle attached to it, and the nozzle discharges a jet of water into the atmosphere at a velocity of 20m/s. This causes the joint of the nozzle with the hose to be in

- (A) Tension      (B) A state of zero stress  
(C) Compression      (D) Bending stress

10. The absolute percentage error in the computed discharge over a rectangular weir corresponding to an absolute error 1.5% in the measurement of head over the sill of the weir would be

- (A) 1.5      (B) 2.25      (C) 2.5      (D) 3.75

11. The terminal velocity of a sphere settling in a viscous fluid varies as

- (A) The Reynolds number  
(B) The square of its diameter  
(C) Directly proportional to the viscosity of the fluid  
(D) Its diameter

12. Distorted models are needed for:

1. Rivers
2. Dams across wide rivers
3. Harbours

(A) 1 and 2 only      (B) 2 and 3 only      (C) 1 and 3 only      (D) 1,2 and 3

13. Match List I with List II and select the correct answer using the code given below the lists:

List I		List II	
P	Sudden closure of a sluice gate	1	Uniform flow
Q	Hydraulic jump in a stilling basin	2	Rapidly varied flow
R	Spreading of irrigation water in a field	3	Unsteady flow
S	Flow in a main irrigation canal	4	Spatially varied flow

- (A) P-1, Q-2, R-4, S-3      (B) P-3, Q-2, R-4, S-1  
 (C) P-1, Q-4, R-2, S-3      (D) P-3, Q-4, R-2, S-1

14. Which one of the following statements is correct?

- (A) For water at 100°C at sea level, the vapour pressure is equal to atmospheric pressure
- (B) Surface energy (or tension) is caused by the force of adhesion between liquid molecules
- (C) Viscosity of a fluid is the property exhibited by it both in static and in dynamic conditions
- (D) Air is 50,000 times more compressible than water


15. Match List I with List II and select the correct answer using the code given below the lists:

List I		List II	
P	Uniform flow	1	Flow through a water supply pipe
Q	Laminar flow	2	Flow through a straight tube of uniform diameter and uniform roughness
R	Turbulent flow	3	Flow above the drainhole of a wash basin
S	Irrotational flow	4	Flow of blood in veins and arteries

- (A) P-3, Q-1, R-4, S-2      (B) P-2, Q-1, R-4, S-3  
 (C) P-3, Q-4, R-1, S-2      (D) P-2, Q-4, R-1, S-3

16. The water surface profile in the flow situation as shown in the figure is:

- (A) S3
- (B) M3
- (C) S2
- (D) M1

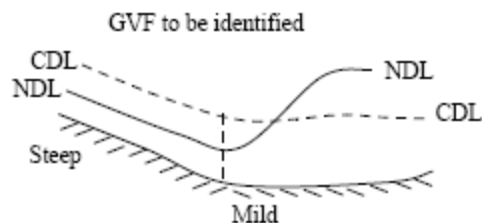

17. Consider the following devices:
1. Orifice
  2. Borda's mouthpiece running free
  3. Bell-mouthed orifice
  4. External mouthpiece
- What is the correct sequence of these devices by decreasing magnitude of coefficient of discharge?
- (A) 2,3,1 and 4            (B) 4,3,1 and 2            (C) 4,1,3 and 2            (D) 2,1,3 and 4
18. Two identical pumps, each capable of delivering 0.2cumec, against a head of 30m, are connected in parallel. The resulting discharge is
- (A) 0.4 cumec against a head of 30m            (B) 0.4 cumec against a head of 60m  
(C) 0.2 cumec against a head of 30m            (D) 0.2 cumec against a head of 60m
19. For attaining maximum efficiency, a Francis turbine runner is so designed as to result in radial discharge at exit. This is done by
- (A) Providing runner vane angle at inlet as  $90^\circ$   
(B) Providing guide vane angle at inlet as  $90^\circ$   
(C) Providing runner vane angle at exit as  $90^\circ$   
(D) Designing for absolute velocity at outlet to be inclined at  $90^\circ$  to the direction of vane there
20. Assume that water vaporizes at an absolute pressure of 1.5m barometric pressure head is 9.5m and 0.1A turbine operates under a head of 40m. The safe height of the runner above the tail water level, in meters is:
- (A) 6            (B) 4            (C) 3            (D) 2
21. A rail which is tapered to a toe at one end and has a heel at the other end is called as:
- (A) Stock rail            (B) Tongue rail            (C) Wing rail            (D) Lead rail
22. A stilling well is required when the stage measurement is made by employing:
- (A) Bubble gauge            (B) Float gauge recorder  
(C) Vertical staff gauge            (D) Inclined staff gauge
23. Consider the following statements.  
Morphological characteristics of a river are represented by:
1. Changes in the river form
  2. Changes in the characteristics of the river bed as a result of variation of discharge in the river
  3. No changes in the river plan form
  4. No changes in the river bed form
- Which of these statements are correct?
- (A) 1 and 2            (B) 1 and 3            (C) 2 and 3            (D) 3 and 4






35. Consider the following statements  
Mitra's hyperbolic transition design is based on the principle that
1. Flow depth in the canal, as well as the discharge, is constant
  2. Width of the canal varies along with the discharge
  3. Rate of change of velocity per unit length of transition is constant throughout the length of the transition.

Which of these statements are correct?

- (A) 1,2 and 3                      (B) 1 and 2 only                      (C) 2 and 3 only                      (D) 1 and 3 only

36. Which one of the groyne arrangements represents an attracting groyne?

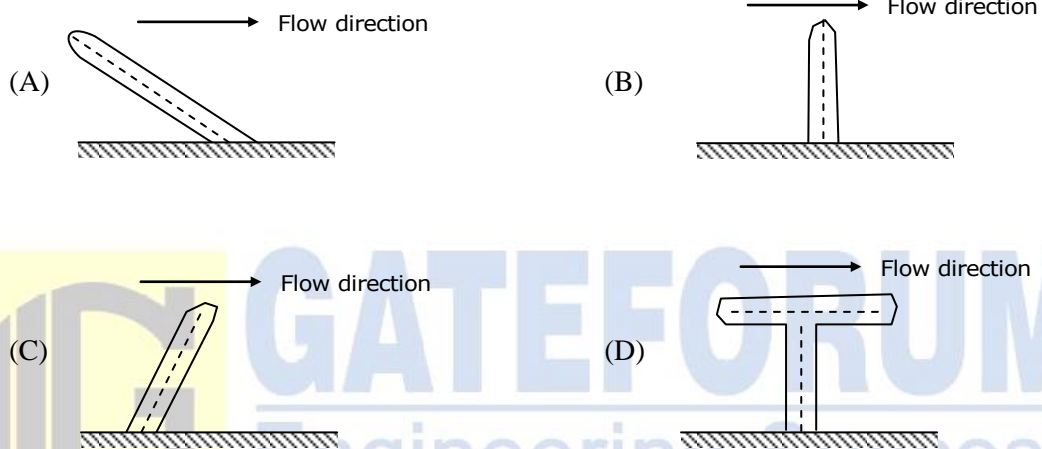

37. Consider the following statements
1. In a super-passage, the drain runs over the canal
  2. In a siphon, the drain runs below the canal
  3. In a siphon aqueduct, type-II, the canal banks are made of RCC walls

Which of these statements are correct?

- (A) 1 only                      (B) 1 and 2 only                      (C) 2 and 3 only                      (D) 1 and 3 only

38. A depth-discharge relationship of canal section is maintained at a notch fall because the sill of the notches is

- (A) Level with downstream canal bed                      (B) Below the upstream canal bed  
(C) Level of upstream canal bed                      (D) Above the upstream canal bed

39. Flexibility of an outlet may be defined as the ratio of the rate of change of

- (A) Outlet discharge to the rate of change of water level of the parent channel  
(B) Outlet discharge to the rate of change of the discharge of the parent channel  
(C) Parent channel discharge to the rate of change of the outlet discharge  
(D) Parent channel water level to the rate of change of the outlet discharge



40. Consider the following statements  
The general depth of scour calculated by Lacey's formula in a river represents the depth below the
1. Maximum flood level in the river
  2. Minimum flow of water level in the river
  3. Normal flow of water level in the river
  4. Existing river bed level
- Which of the statements is / are correct?  
(A) 1,2,3 and 4      (B) 1,2 and 3 only      (C) 2,3 and 4 only      (D) 1 only

41. If organic sources of carcinogenic compounds in water persist even after chlorination, then what's the correct sequence among treatment processes listed below if all these are considered compulsory?
1. Coagulation
  2. Sedimentation
  3. Filtration in general
  4. Activated carbon bed filtration
  5. Flocculation
  6. Chlorination
- (A) 4,5,3,2,6 and 1      (B) 1,2,3,4,5 and 6  
(C) 4,2,3,1,5 and 6      (D) 1,5,2,3,4 and 6

42. Match List I with List II and select the correct answer using the code given below the lists

List I (parameters)		List II (units)	
P	Turbidity	1	TON
Q	Pathogen	2	TCU
R	Odour	3	JTU
S	Colour	4	MPN

- (A) P-2, Q-1, R-4, S-3      (B) P-3, Q-1, R-4, S-2  
(C) P-2, Q-4, R-1, S-3      (D) P-3, Q-4, R-1, S-2

43. Match List I with List II and select the correct answer using the code given below the lists

List I		List II	
P	Viruses in water	1	Parasite-based diseases
Q	Depletion of oxygen	2	Fish extinction
R	Excess nitrates in water	3	Methemoglobinemia
S	Excess fluorides in water	4	Mottling of teeth

- (A) P-1, Q-2, R-3, S-4      (B) P-4, Q-2, R-3, S-1  
(C) P-1, Q-3, R-2, S-4      (D) P-4, Q-3, R-2, S-1





48. Which of the following operational problems relate to the functioning of rapid gravity filter?
1. Inadequate media comprising filter bed
  2. Sludge baking
  3. Mud balls
  4. Negative head
  5. Incrustation of media
- (A) 1,3,4,5                      (B) 1,2,3,4                      (C) 2,3,4,5                      (D) 1,2,3,4,5

49. Conversion of dynamic velocity head into static pressure head in a centrifugal pump is the result of
- (A) Increasing area of flow between adjacent vanes from inlet to outlet
  - (B) Difference in pressure between suction and delivery ends
  - (C) Radial thrust in pumps
  - (D) Stuffing box

50. Match List I with List II and select the correct answer using the code given below the lists

List I		List II	
P	Steel pipe	1	Highly resistant to corrosion but can break easily
Q	Concrete pipe	2	Virtually corrosion resistant
R	A.C. pipe	3	Sulfide corrosion
S	Vitrified clay pipe	4	Electrolyte corrosion

- (A) P-2, Q-3, R-1, S-4                      (B) P-4, Q-3, R-1, S-2  
(C) P-2, Q-1, R-3, S-4                      (D) P-4, Q-1, R-3, S-2

51. Match List I with List II and select the correct answer using the code given below the lists

List I		List II	
P	Pelton turbine	1	Mixed flow reaction turbine
Q	Francis turbine	2	Operating under low head and large discharge
R	Kaplan turbine	3	Operating under high head and large discharge
S	Banki turbine	4	No draft tube

- (A) P-4, Q-2, R-1, S-3                      (B) P-3, Q-1, R-2, S-4  
(C) P-4, Q-1, R-2, S-3                      (D) P-3, Q-2, R-1, S-4

52. Consider the following statements

Activated sludge process can be said to comprise

1. Conversion of dissolved organic matter into biological flocs
2. Removal of dissolved BOD of the waste water
3. Digestion of the sludge

Which of these statements are correct?

- (A) 1,2,3                      (B) 1,2                      (C) 2,3                      (D) 1,3

53. Which one of the following tests employs ferroin indicator?  
(A) Chemical oxygen demand (B) Ammonia nitrogen  
(C) Nitrate nitrogen (D) Fluoride
54. During sewage treatment, effluent from which one of the following treatment units has minimum wt. vol. amount of suspended solids?  
(A) Detritus channel  
(B) Primary sedimentation tank  
(C) Secondary sedimentation tank  
(D) Activated sludge process aeration tank
55. In a pressure penstock 4500m long, water is flowing at a velocity of 4m/s. If the velocity of the pressure wave travelling in the pipe due sudden complete closure of a valve at a downstream end, is given as 1500m/s, what would be the period of oscillation in seconds under frictionless condition?  
(A) 6 (B) 8 (C) 9 (D) 11
56. The group of micro-organisms involved in production of methane from acetic acid (or acetate) in anaerobic wastewater treatment processes is  
(A) Methanothrix and Methanobacterium  
(B) Methanobacterium and Methanosarcina  
(C) Methanosarcina and Methanospirillum  
(D) Methanothrix and Methanosarcina
57. When sufficient energy through mechanical mixing is supplied to keep the entire contents, including the sewage solids, mixed and aerated, the reactor is termed  
(A) An aerobic lagoon (B) An aerobic pond  
(C) A facultative lagoon (D) A facultative pond
58. Deep ponds, in which oxygen is absent except, perhaps, across a relatively thin surface layer, are called  
(A) Aerobic ponds (B) Anaerobic ponds  
(C) Facultative ponds (D) Polishing ponds
59. The manufacturer of aeration devices reports the oxygen transfer rate of the device obtained through laboratory tests carried under standard conditions. Such standard conditions are  
(A) Wastewater at zero DO, 25°C and 760mm Hg  
(B) Tap water at zero DO, 0°C and 700mm Hg  
(C) Tap water at zero DO, 20°C and 760mm Hg  
(D) Wastewater at zero DO, 0°C and 700mm Hg

60. Which of the following are responsible for the formation of photochemical smog?
1. Light intensity
  2. Ratio of hydrocarbons to nitric oxide
  3. CO<sub>2</sub>
  4. Hydrocarbon reactivity
  5. SO<sub>2</sub>
- (A) 1,2,3,4,5                      (B) 1,2,4                      (C) 2,3,4                      (D) 2,3,5
61. A flow net for seepage under a sheet pile wall has  $n_r = 4$ ,  $n_d = 8$  and the permeabilities of the soil in the horizontal and vertical directions are  $K_H = 8 \times 10^{-5} \text{ m/s}$  and  $K_V = 2 \times 10^{-5} \text{ m/s}$ . If the head loss through the soil is 2m, the quantity of seepage per meter length of the wall will be
- (A)  $2 \times 10^{-5} \text{ m}^3 / \text{s}$                       (B)  $4 \times 10^{-5} \text{ m}^3 / \text{s}$   
 (C)  $8 \times 10^{-5} \text{ m}^3 / \text{s}$                       (D)  $16 \times 10^{-5} \text{ m}^3 / \text{s}$
62. On analysis of particle size distribution of a soil, it is found that  $D_{10} = 0.1 \text{ mm}$ ,  $D_{30} = 0.3 \text{ mm}$  and  $D_{60} = 0.8 \text{ mm}$ . The uniformity coefficient and coefficient of curvature, as given by the particle size distribution curve, are, respectively
- (A) 3 and 3                      (B) 2.67 and 1.125                      (C) 2.67 and 3                      (D) 8 and 1.125
63. Match List I with List II and select the correct answer using the code given below the lists
- | List I |                  | List II |                     |
|--------|------------------|---------|---------------------|
| P      | Plate load       | 1       | Specific gravity    |
| Q      | Pycnometer       | 2       | Bearing capacity    |
| R      | Core cutter      | 3       | Grain size analysis |
| S      | Mechanical sieve | 4       | Field density       |
- (A) P-3, Q-1, R-4, S-2                      (B) P-2, Q-1, R-4, S-3  
 (C) P-3, Q-4, R-1, S-2                      (D) P-2, Q-4, R-1, S-3
64. When the compaction energy increases the compaction of soils
- (A) Both of OMC and maximum dry density decrease
  - (B) Both of OMC and maximum dry density increase
  - (C) OMC decreases but maximum dry density increases
  - (D) OMC increases but maximum dry density decreases
65. Unconfined compression test is most suitable for determining the
1. Sensitivity of clays
  2. Settlement of embankments
  3. Strength of partially saturated clay sample
  4. Strength of fully saturated clay sample
- (A) 1,2,3,4                      (B) 2,3                      (C) 3,4                      (D) 1,4

66. During consolidation process of clayey soils, indicate the sequence of occurrence of the following events in the order from first to last
1. Load being taken up by the pore water
  2. Load being taken up by the soil grains
  3. Drainage of water from the pores of the soil
- (A) 1,2,3                      (B) 2,3,1                      (C) 1,3,2                      (D) 2,1,3
67. If instead of single drainage, the number of drainage faces are increased to two in responding soils, the rate of compression will be
- (A) 4 times slower      (B) 2 times slower      (C) 4 times faster      (D) 2 times faster
68. Settlement due to creep in soils is contingent on
- (A) Primary consolidation                      (B) Secondary consolidation  
(C) Initial settlement                      (D) Compaction settlement

69. Match List I with List II and select the correct answer using the code given below the lists

List I		List II	
P	Geophysical methods	1	Primary for cohesive soils
Q	SPT	2	Clays and silts
R	DCPT	3	Reconnaissance covering large area and large depth
S	Piston type sampler	4	Suitable for sandy soils

- (A) P-2, Q-1, R-4, S-3                      (B) P-3, Q-1, R-4, S-2  
(C) P-2, Q-4, R-1, S-3                      (D) P-3, Q-4, R-1, S-2
70. The observed N-value from a standard penetration test conducted in saturated sandy strata is 30; the N-value corrected for dilatancy may be taken as
- (A) 15                      (B) 20                      (C) 23                      (D) 39
71. Which one of the following statements is correct?
- (A) Dynamic viscosity is the property of a fluid which is not in motion  
(B) Surface energy is a fluid property giving rise to the phenomenon of capillarity in water  
(C) Cavitation results from the action of very high pressure  
(D) Real fluids have lower viscosity than ideal fluids
72. The lateral earth pressure coefficients of a soil,  $K_a$  for active state,  $K_p$  for passive state, and  $K_0$  for rest condition, compare as
- (A)  $K_0 < K_a < K_p$       (B)  $K_a < K_0 < K_p$       (C)  $K_a < K_p < K_0$       (D)  $K_p < K_0 < K_a$

73. In a closed traverse ABC, following readings were taken

Line	Fore Bearing	Back Bearing
AB	20°	201°
BC	101°	278°
CA	278°	50°

Station A is free from local attraction. Correct bearing of CB is

- (A) 275°                      (B) 276°                      (C) 281°                      (D) 280°

74. Best side slope for most economical trapezoidal section in open channel flow, wherein side slopes are defined by X horizontal to 1 vertical is when X equals

- (A) 0.404                      (B) 0.500                      (C) 0.577                      (D) 0.673

75. Two footings, one circular and the other square, are founded on the surface of a purely cohesionless soil. The diameter of the circular footing is the same as that of the side of the square footing. The ratio between their ultimate bearing capacities will be

- (A) 1.0                      (B) 1.3                      (C) 1.33                      (D) 0.75

76. Match List I with List II and select the correct answer using the code given below the lists

List I		List II	
P	Large diameter piles	1	Heavy loads in water structures, but foundation strata at shallow depth
Q	Drilled pier	2	Heavy loads in water structures with horizontal loads
R	Open caisson	3	Heavy but isolated loads
S	Box caisson	4	Very heavy loads

- (A) P-3, Q-2, R-1, S-4                      (B) P-1, Q-2, R-4, S-3  
(C) P-3, Q-4, R-2, S-1                      (D) P-1, Q-4, R-2, S-3

77. Whole from the whole to the part is followed as the fundamental principle of surveying so as to

1. Distribute errors
2. Improve ease of working
3. Prevent accumulation of errors
4. Compensate errors in a way
5. Refer to a common datum, say MSL

- (A) 1,2 and 4                      (B) 1,3 and 5                      (C) 3 and 4                      (D) 2 and 5

78. A rectangular plot of 16km<sup>2</sup> in area is shown on the map by a similar rectangular area of 1cm<sup>2</sup>. RF of the scale to measure a distance of 40km will be

- (A)  $\frac{1}{1600}$                       (B)  $\frac{1}{400000}$                       (C)  $\frac{1}{400}$                       (D)  $\frac{1}{16000}$



79. An object on the top of a hill 100m high is just visible above the horizon from a station at sea level. The distance between the station and the object is  
 (A) 38.53km (B) 3.853km (C) 3853km (D) 385.3km
80. The magnitude of sag correction during measurement of lengths by taping is proportional to the  
 (A) Cube of the weight of the tape, in kg per m run  
 (B) Cube root of the weight of the tape, in kg per m run  
 (C) Square of the weight of the tape, in kg per m run  
 (D) Square root of the weight of the tape, in kg per m run
81. The angle between the index glass and the horizon glass of a box sextant is  $40^\circ$ , the horizontal angle between the two points sighted by the instrument is  
 (A)  $20^\circ$  (B)  $60^\circ$  (C)  $40^\circ$  (D)  $80^\circ$
82. Which of the following statements is incorrect?  
 (A) A surveyor's compass has two sight vanes  
 (B) A prismatic compass has an object vane and an eye vane  
 (C) A trough compass is an accessory to a plane table  
 (D) In a prismatic compass the graduations on the aluminium disc rotate and the index remains stationary
83. Match List I with List II and select the correct answer using the code given below the lists

List I		List II	
P	Traverse surveying	1	Weddels' sounding machine
Q	Geodetic surveying	2	Alidade
R	Plane table surveying	3	Chain and compass
S	Hydrographic surveying	4	Theodolite

- (A) P-3, Q-4, R-2, S-1 (B) P-1, Q-4, R-2, S-3  
 (C) P-3, Q-2, R-4, S-1 (D) P-1, Q-2, R-4, S-3
84. Which of the following statements is incorrect?  
 (A) Parallax error is eliminated when there is no change in the staff reading when eye is moved up and down  
 (B) The objective lens is to be focused towards a white or bright background for clear visibility of cross-hairs  
 (C) Temporary adjustments of the dumpy level are to be performed at every setup  
 (D) The eyepiece need not be adjusted after the first setup when the same surveyor is taking readings



85. The purpose of a satellite station in triangulation can be served by  
(A) A Church spire in order to secure a well shaped triangle  
(B) A Flag pole in order to secure a well-shaped triangle  
(C) A Steeple in order to secure a well shaped triangle  
(D) An Eccentric station near the true station whereon the instrument cannot be setup
86. The sum of the three interior angles of a triangle, the vertices of which lie on the surface of the earth covering a vast area of several hundreds of sq. kms is  
(A) Less than  $180^\circ$   
(B) Equal to  $180^\circ$   
(C) More than  $180^\circ$  but less than  $270^\circ$   
(D) More than  $180^\circ$  but not more than  $225^\circ$
87. With all other relevant conditions remaining the same, the speed of the vehicle negotiating a curve is proportional to  
(A)  $\sqrt{\text{Weight of the vehicle}}$  (B) Weight of vehicle  
(C)  $\frac{1}{\text{Weight of the vehicle}}$  (D)  $\frac{1}{\sqrt{\text{Weight of the vehicle}}}$
88. If a 'vertical aerial photograph', (20 cm x 20 cm) in size, on a R.F. 1: 10,000, has 60% longitudinal overlap and 40% side overlap, the actual ground length covered by each photograph in the longitudinal direction of the flight will be  
(A) 4km (B) 6km (C) 0.8km (D) 0.4km
89. If the original scale of a negative is 1:10,000, the ground resolution, considering that we get nearly 20 lines pair per mm, will be  
(A) 50mm (B) 20cm (C) 2m (D) 25cm
90. In a solution of the three-point problem in plane table surveying, the converging of error is attained through  
(A) Conyclic concept (B) Bessel's method  
(C) Triangle of error (D) Tracing paper method
91. A 3% downgrade curve is followed by a 1% upgrade curve and rate of change of grade adopted is 0.1% per 20m length. The length of the respective vertical curve is  
(A) 800 m (B) 200 m (C) 100 m (D) 400 m
92. In a concrete pavement, during summer, at and soon after mid-day, the combined stress at the interior of the slab is equal to  
(A) Wheel load stress + Temperature warping stress + Sub grade resistance stress  
(B) Wheel load stress + Temperature warping stress – Sub grade resistant stress  
(C) Wheel load stress – Temperature warping stress + Sub grade resistant stress  
(D) Wheel load stress – Temperature warping stress - Sub grade resistant stress

93. Match List I with List II and select the correct answer using the code given below the lists:

List I		List II	
P	Lateral friction	1	Disparity between relevant travel distances
Q	Cut-off lagoons	2	Vehicle movement on curve
R	Skid	3	Summit curves
S	Sight distance	4	Prevention of flooding

- (A) P-2, Q-1, R-4, S-3  
(B) P-3, Q-1, R-4, S-2  
(C) P-2, Q-4, R-1, S-3  
(D) P-3, Q-4, R-1, S-2

94. Which of the following correspond to the recommendations of IRC for pavement thickness determination by CBR Method ?

1. CBR tests are to be conducted in-situ
  2. Static compression is best adopted
  3. The top 50 cm of sub grade should be compacted to as near the proctor density as possible
- (A) 1, 2 and 3  
(B) 1 and 2 only  
(C) 2 and 3 only  
(D) 1 and 3 only

95. If the ruling gradient is 1 in 150 on a particular section of a broad gauge track, the allowable ruling gradient on a  $4^\circ$  curve in the track will be

- (A) 0.51%                      (B) 0.53%                      (C) 0.61%                      (D) 0.67%

96. Wind-rose diagram is useful in deciding on the orientation of

- (A) Taxiway                      (B) Hanger                      (C) Apron                      (D) Runway

97. Which of the following complete sets do not recommend the siting of a harbor layout in that vicinity?

1. Submarine canyon
  2. Lee of an island
  3. Closely located promontories
  4. Indentation coves on the coastline
  5. Hooked bays with not-so-rugged rocky bottom
- (A) 2, 3, 4 and 5                      (B) 1, 4 and 5 only  
(C) 2, 3 and 4 only                      (D) 3, 4 and 5 only

98. Match List I with List II and select the correct answer using the code given below the lists:

List I		List II	
P	Rails	1	Connect one section of rail to next
Q	Sleepers	2	Convert lien load into uniformly distributed load
R	Ballast	3	Convert point load into uniformly distributed load
S	Fish Plates	4	Convert rolling loads into points load(s)

- (A) P-4, Q-3, R-2, S-1  
(B) P-1, Q-2, R-3, S-4  
(C) P-4, Q-2, R-3, S-1  
(D) P-1, Q-3, R-2, S-4

99. For safe landing and takeoff, the following factors need to be carefully considered:

1. Cross-wind
2. Runway grade
3. Runway width and side clearance
4. Obstructions

- (A) 1, 2 and 3 only  
(B) 1, 2, 3 and 4  
(C) 1, 3 and 4 only  
(D) 2, 3 and 4 only

100. Overland flow drainage on and from the tarmac of an airport invokes, in its design, principles involving

- (A) Spatially varied flow without hydraulic jumps  
(B) Backwater flow  
(C) Subcritical flow throughout  
(D) Attention to rolling flows within spatially varied flows and possibly to moving hydraulic jumps

**Directions: -**

Each of the next Twenty (20) items consists of two statements, one labeled as the 'Assertion (A)' and the other as 'Reason (R)'. You are to examine these two statements carefully and select the answers to these items using the codes given below:

**Codes:**

- (A) Both A and R are individually true and R is the correct explanation of A  
(B) Both A and R are individually true but R is NOT the correct explanation of A  
(C) A is true but R is false  
(D) A is false but R is true

101. **Assertion (A)** : At the point of boundary layer separation, the shear stress is zero.  
**Reason (R)** : The point of separation demarcates between zones of forward and reverse flow close to the wall.
102. **Assertion (A)** : Loss of head at a sudden contraction in a pipe is smaller than the loss at a sudden expansion in the pipe.  
**Reason (R)** : Increase in turbulence level is higher at a sudden expansion than at a sudden contraction.
103. **Assertion (A)** : The efficiency of a reciprocating pump is 10-20 percent higher than that of a centrifugal pump for comparable discharge head conditions.  
**Reason (R)** : The discharge from a reciprocating pump is dependent upon speed.

104. **Assertion (A)** : In centrifugal pumps, flow takes places from low pressure zone to high pressure zone.  
**Reason (R)** : Possibility of separation occurring in pumps can be more; and characterizing efficiency of pumps is less than that of turbines.
105. **Assertion (A)** : In the case of water power plants, it is advisable to provide the surge tank as close to the turbine unit as possible.  
**Reason (R)** : Purpose of surge tank is to provide the intended protection for the portion of the penstock which lies on the upstream of it.
106. **Assertion (A)** : Fluorides should always be present in drinking water upto a value 1.5 mg/l.  
**Reason (R)** : Such a water helps clean the teeth well.
107. **Assertion (A)** : The duty of water decreases as the point of its measurement moves away from the field of application.  
**Reason (R)** : Duty depends on soil characteristics.
108. **Assertion (A)** : The BOD gets removed at a very fast rate immediately after sewage is discharged into a river.  
**Reason (R)** : A part of the BOD in the sewage is due to settleable organic matter therein.
109. **Assertion (A)** : The bottom layers of water in a deep reservoir are usually not acceptable as raw water in a water supply system.  
**Reason (R)** : The bottom water layers may contain products of anaerobic degradation.
110. **Assertion (A)** : Disinfection is the last treatment given to water before it is supplied to consumers.  
**Reason (R)** : Any other treatment after disinfection may incidentally also contaminate the water.
111. **Assertion (A)** : Laterals of minimum specified diameter in sewerage systems have to be laid at slopes designed for self – cleaning velocity.  
**Reason (R)** : For the specified minimum lateral diameter at specified slopes, a minimum flow rate is not essential to maintain self – cleansing velocity.
112. **Assertion (A)** : In non – cohesive soils, settlement occurs immediately after application of load.  
**Reason (R)** : The settlement is attributed to volume changes caused by lateral yielding or shear strains occurring in the soil.

113. **Assertion (A)** : In the secondary sedimentation tank of a sewage treatment plant, the settling particles form a blanket which descends and captures more particles.
- Reason (R)** : The particles are flocculant and in very high concentration whenever there is an efficient working activated sludge, or trickling filter, process.
114. **Assertion (A)** : Batter piles are provided to resist lateral loads coming onto structures.
- Reason (R)** : The batter of batter piles is helpful in converting a part of the applied lateral load into axial compressive load on the batter piles.
115. **Assertion (A)** : The angle made by the lines of the magnetic force with the earth's surface is called dip.
- Reason (R)** : In the northern hemisphere, the south end of the needle dips downwards; and in the southern hemisphere, the north end of the needle dips downwards.
116. **Assertion (A)** : The diurnal variation is the variation of the declination in a year from the mean position during the year.
- Reason (R)** : The diurnal variation is greater in summer than in winter.
117. **Assertion (A)** : Reciprocal leveling is adopted to decide the precise difference of level between two points at a considerable distance apart.
- Reason (R)** : Reciprocal leveling eliminates errors due to:
- Curvature,
  - Refraction, and
  - Line of collimation not being exactly parallel to bubble line.
118. **Assertion (A)** : IRC has recommended a minimum coefficient of friction in the longitudinal direction on wet pavements after allowing a suitable factor of safety in the range 0.15 – 0.30
- Reason (R)** : When the longitudinal coefficient of friction on 0.40 is allowed for stopping the vehicle, the resultant retardation is 3.93 m/sec<sup>2</sup>, which is not too uncomfortable to the passengers.
119. **Assertion (A)** : The efficiency of the sheepfoot roller depends on the weight of the roller and the number of 'feet' in contact with the ground at a time.
- Reason (R)** : Sheepfoot rollers are considered most suitable for compacting clayey soils.

120. **Assertion (A)** : In a compaction test, at  $\gamma_{d_{max}}$  and OMC, the degree of saturation is never 100%.
- Reason (R)** : It is not possible to expel all the air entrapped in soil by compaction.

